

Sand Trap Channel and Soft-Head Kerb Placement Plan

Long jump and triple jump embedded components installation detail

This document shows the coordinated placement of the sand trap channel, metal take-off board box and soft-head kerb around the sand pit.

Product and quantity summary

112 cm sand trap channel	2 pcs
50 cm sand trap channel	44 pcs
50 cm soft-head kerb	48 pcs


Installation notes

- Install the lower edge of the metal box facing away from the sand pit.
- The finished synthetic surface and the long/triple jump take-off board must be at the same elevation.
- The section indicates 18 mm synthetic surfacing over a 5 cm asphalt layer.
- Verify final site dimensions against the project-specific construction drawing.


The dimensioned source drawing is included on the following page. English terminology is provided on this cover.

UZUN VE ÜÇ ADIM ATLAMA GÖMÜLÜ ELEMANLARI UYGULAMA DETAYI

- 50 cm Yumuşak Başlı Bordür : 48 adet
- 50 cm Kum Tutucu: 44 adet
- 112 cm Kum Tutucu: 2 adet

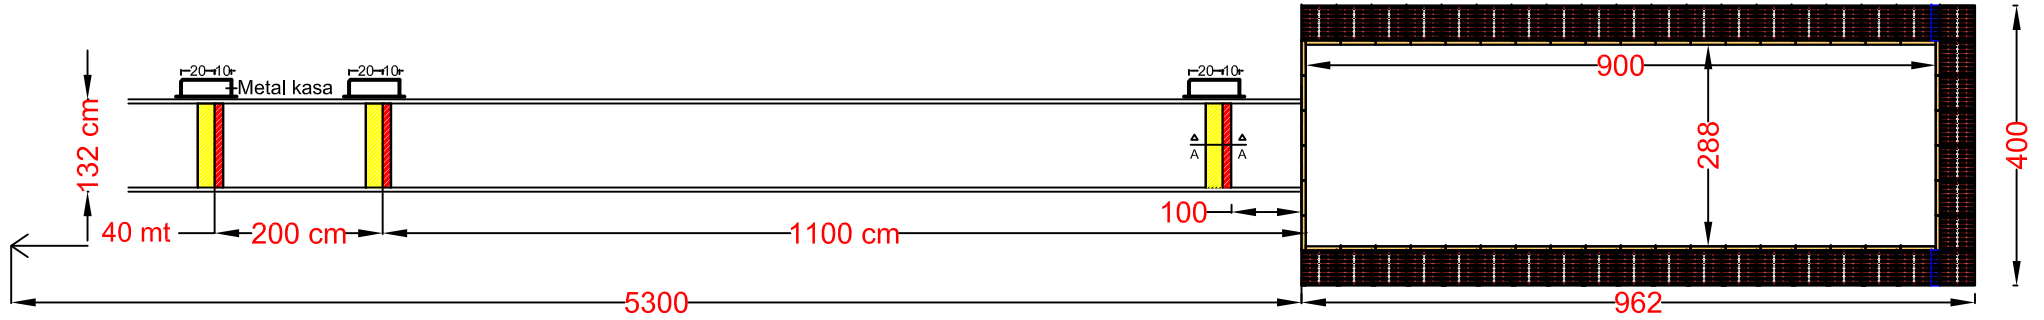

Metal kasanın düşük kenar kısmı
kum havuzuna zıt yönde monte edilmelidir.

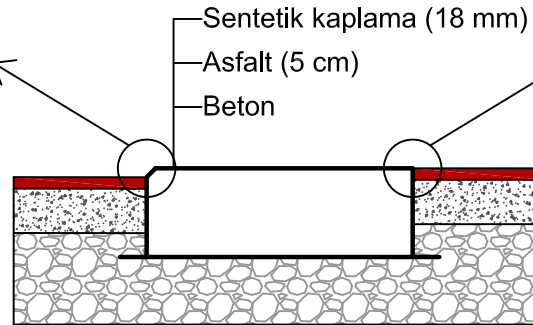

A-A KESİTİ

Not: Sentetik kaplamanın üst kotu ile
Uzun ve üç adım atlama tahtasının
üst kotu aynı olacaktır.